


LUMISEAL

security meter seal

Lumiseals are moulded in polycarbonate.

Applicable with sealing wire in: electric, gas & water meters, payphones, calibration valves, monetary safe deposits in banks, cash bags, storage rooms, reservoirs, vans, containers, fuel stations, offices, cash boxes, game machines, etc.

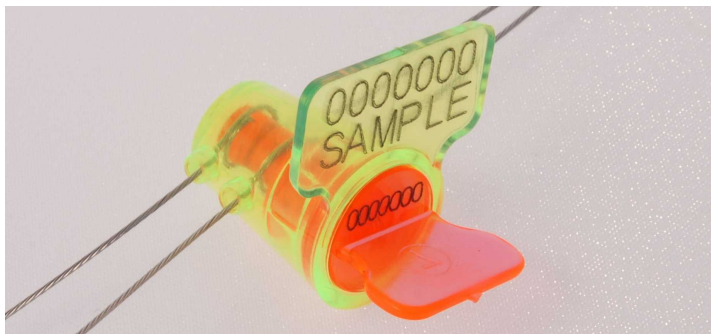

Transparent body - complete visual of locking mechanism and clear indication of tampering.

Withstands extreme weather conditions.

Etched with permanent laser marking - Logo, Number, Barcode, DataMatrix (2D) barcode, **NEW** QR-code.

Easy to use. Wire rotates around the insert rotor.

Designed for single use, destruct when open.

Cannot be easily open - cutting pliers needed for removal.

The best price/quality ratio.

Cost-effective Easy Application


The unique seven-digit number identifies the seal.

Duplication of the full sequential number on rotor part of the seal.

Laser marking of the number and logo offers the highest level of security as it cannot be removed or replaced.

Special material of the seal, combining spring power and frangibility characteristics, doesn't allow opening the seal after placing it without breaking the body.

Material of the seal not changing their properties in $-80^{\circ}\text{C} \dots +120^{\circ}\text{C}$ (-112° to 248° Fahrenheit) temperature range.

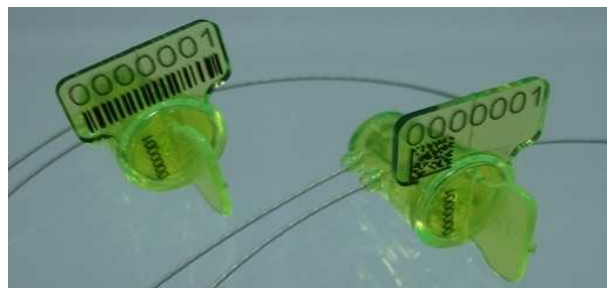


The own glowing in UV light


Having glowing effect in UV light, Lumiseal allows control of keeping the sealed object intact in hard-to-reach and darkened places.



Rua Guajajaras, 40 • sala 306 • Centro
CEP 30180-100 • Belo Horizonte • MG
Telefones: 55 31 3232-0400
Fax: 55 31 3232-0401
comercial@utili.com.br • www.utili.com.br

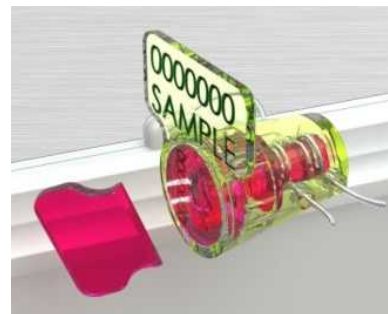

Lumiseal technical information:

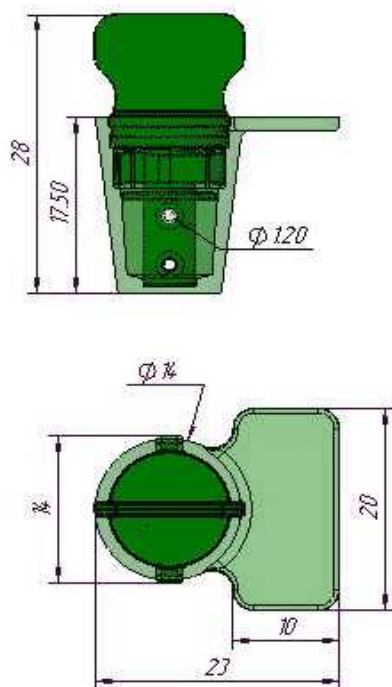

Type of security seal	Rotor
Locking mechanism	Molded rotor mounting with ratchet
Material	Polycarbonate
Overall dimensions, mm / inches	28x23x20 / 1.102x0.905x0.787
Type of marking	Laser
Colors	Different
Numeration	7-digit number. The seal number is duplicated on the insert. The continuous numbering, regardless of the customer's logo.
Customer logo	Alphanumeric and graphic
Holes diameter for seal wire, mm / inches	1.2 / 0.047
Max seal wire diameter, mm / inches	1.1 / 0.043
Temperature range of use	From -80°C to +120°C / From -112° to 248° Fahrenheit
Resistance to aggressive environment	Chemically resistant
Warranty, years	5
Removal	With special cutters

package	bag	carton box	carton box
Packaging, pcs	100	1000	6000
Packaging size, mm / inches	160x200 / 6,3x7,87	350x155x135 / 13,78x6,10x5,31	420x330x360 / 16,53x12,99x14,17
Packaging weight, kg / lbs	0,2 / 0,44	2,2 / 4,85	13,8 / 30,42

